


PB-24-50

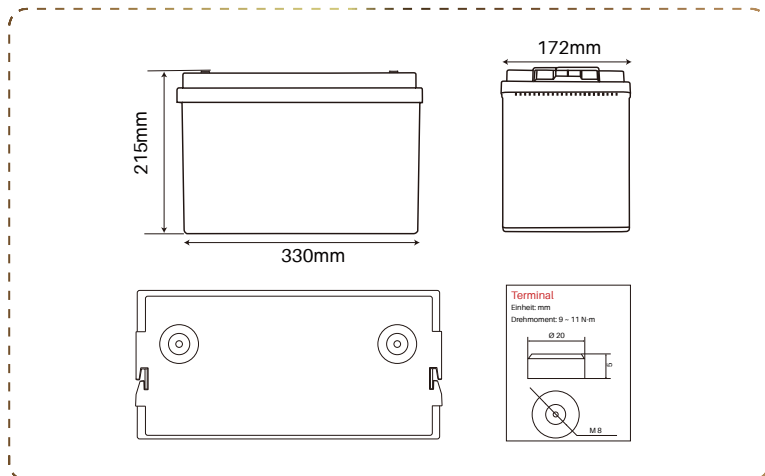

LITHIUM BATTERY

Strong Advantages

- 6 Years Warranty
- Replacement of lead-acid battery
- Lighter weight and easier to handle
- Lithium iron phosphate is more stable
- Maximum service life of over 6000 cycles
- Long-lasting modular construction
- Screw opening, perfect crafted internal structure design

BMS

Battery Management System

The BMS monitors and controls the individual cells of a battery and protects them from damage, such as overload and overvoltage

BLUETOOTH 4.0 INTEGRATED Multiple Battery Monitoring Function

Perfektium Pro APP can monitor up to 8 batteries at the same time. The SOC, voltage, current, temperature, available time of the batteries can be detective.





Specification

Items	Characteristics
Model	25.6V 50Ah/1280Wh
Replaces Gel-AGM battery	25.6V 100Ah
Cell type	Prismatic cell
Dimension with terminals (L x W x H)	330*172*215mm
Weight (No Accessories)	11,1Kg
Cycle Life	>6000@80%D.o.D
Internal Resistance	≤7 mΩ
Recommended Charge Voltage	29.2V
Float Charge Voltage (For standby use)	27.2V
Recommended Charge Current	15A
Max Charge Current	25A
Continuous Discharge Current	80A
Peak Discharge Cut-Off Current	150A (200~500ms)
Operating Voltage Range	20 - 29.2V
End of Discharge Voltage Range	20 - 22.4V
Terminal Type	M8
Ingress Protection Code	IP65
Charge Temperature	0~50°C
Discharge Temperature	-20~75°C
Storage Temperature	-5~35°C
Storage Condition	Charging the battery every 3 months
Series & Parallel Availability	Maximum 2 pcs in series and 4 pcs in parallel
Certifications	CE/UL/UN38.3 /MSDS /ROHS/UN 3480/ CLASS9/ECE R10