

ERFEKTIVUM

4.0
Batteriezustand

6

12.8V 620Ah 7936Wh


PB - Series Lithium Batterie

Smart Bluetooth BMS

Achtung!

NICHT Erhitzen oder verkohlen die Batterie.
NICHT Tauchen die Batterie in Flüssigkeiten ein.
NICHT Kurzschließen, zerquetschen oder zerlegen die Batterie.

Bitte bei 80% Kapazität lagern und alle 3 Monate aufladen.
Lagern Sie Akkus an einem trockenen und kühlen Ort.
Halten Sie Akkus fern von direkter Sonnenstrahlung.

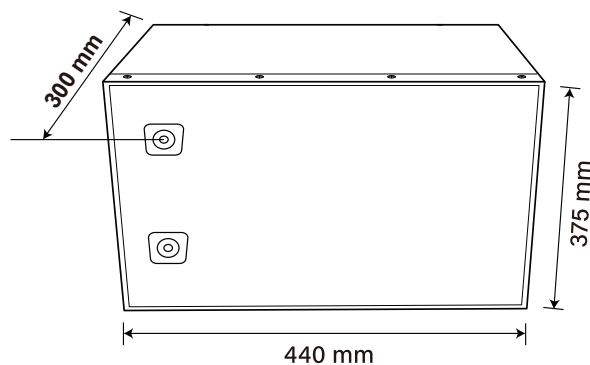

Strong Advantages

- 6 Years Warranty
- Replacement of lead-acid battery
- Lighter weight and easier to handle
- Lithium iron phosphate is more stable
- Maximum service life of over 6000 cycles
- Long-lasting modular construction
- Screw opening, perfect crafted internal structure design

Battery Management System

The BMS monitors and controls the individual cells of a battery and protects them from damage, such as overload and overvoltage



Perfektium Pro APP can monitor up to 8 batteries at the same time. The SOC, voltage, current, temperature, available time of the batteries can be detective.





Specification

Items	Characteristics
Model	12.8V 620Ah/7936Wh
Replaces Gel-AGM battery	12.8V 1240Ah
Cell type	Prismatic cell
Dimension with terminals (L x W x H)	440*375*300mm
Weight (No Accessories)	61.6kg
Cycle Life	>6000@80%D.o.D
Internal Resistance	≤7 mΩ
Recommended Charge Voltage	14.6V
Float Charge Voltage (For standby use)	13.8±0.8V
Recommended Charge Current	100A
Max Charge Current	150A
Continuous Discharge Current	300A
Peak Discharge Cut-Off Current	800A ± 150A
Operating Voltage Range	10 - 14.6V
End of Discharge Voltage Range	10 - 11.2V
Terminal Type	M8
Ingress Protection Code	IP62
Charge Temperature	0~50°C
Discharge Temperature	-20~75°C
Storage Temperature	-5~35°C
Storage Condition	Charging the battery every 3 months
Series & Parallel Availability	Maximum 4 pcs in series and 4 pcs in parallel
Certifications	CE/UL/UN38.3 /MSDS /ROHS/UN 3480/ CLASS9/ECE R10